


## H25/33

Bore 250mm, Stroke 330 mm

HYUNDAI-HIMSEN

Main Data							
Speed	1000rpm		900rpm				
Frequency	50Hz		60Hz				
<b>Model</b>	<b>Genset .kw</b>	<b>Engine .kw</b>	<b>Genset .kw</b>	<b>Engine .kw</b>			
6H25/33	1,710	1,800	1,653	1,740			
7H25/33	1,995	2,100	1,929	2,030			
8H25/33	2,292	2,400	2,215	2,320			
9H25/33	2,592	2,700	2,505	2,610			
Based on alternator efficiency of 95-96%							
Specific Consumption at Engine & Heat Rate							
100% Load	Unit	1000rpm	900rpm				
Fuel Oil Consumption	g/kWh	181	181				
Lube oil consumption	g/kWh	0.6					
Heat Rate	KJ/kWh <sub>m</sub>	7,729	7,729				
	KJ/kWh <sub>e</sub>	8,135	8,135				
Dimensions							
Speed	Cyl.	Dimensions(mm)				Dry Mass(ton) <sub>2)</sub>	
		A	B <sub>1)</sub>	C <sub>1)</sub>	H	Engine <sub>3)</sub>	Genset <sub>1),4)</sub>
900/1000rpm	6	4,414	2,262	6,676	2,961	20.2	30.2
	7	4,794	2,262	7,056	3,241	22.5	32.7
	8	5,311	2,340	7,651	3,371	24.1	34.9
	9	5,691	2,490	8,181	3,371	26.2	37.2

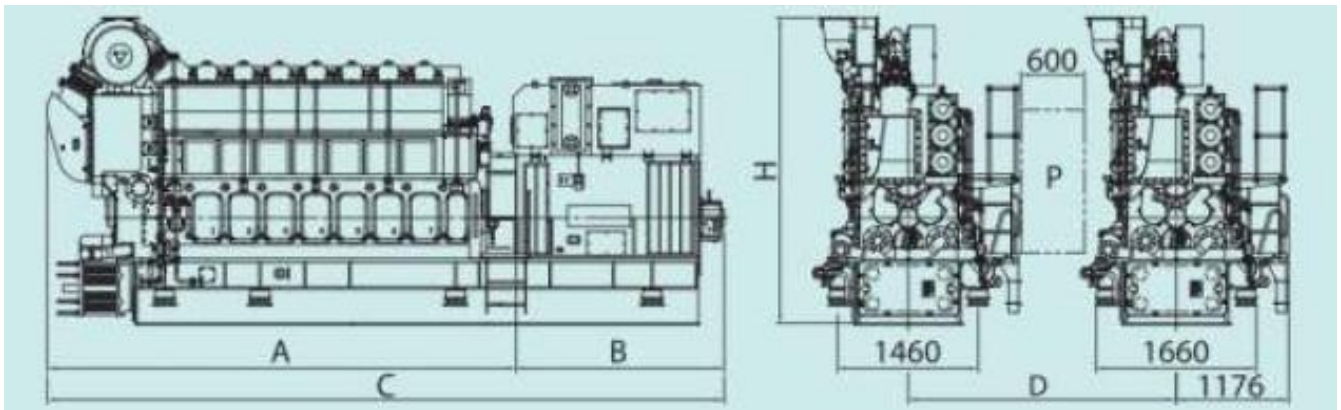

### Remarks:

- 1) Depending on alternator.
  - 2) Weight included a standard alternator (Maker: HHI-EES).
  - 3) Without common base frame.
  - 4) With common base frame & alternator.
- D: Min. distance between engines 2,844 mm (with gallery).  
P: Free passage between the engines, width 600 mm and height 2,000 mm.  
Note) All dimensions and weight are approximate value and subject to change without prior notice.

URL: <http://www.soarpower.com>

E-mail: [sale@soarpower.com](mailto:sale@soarpower.com)

Phone: +86-4008111308