

Marine Offshore Gensets

H27DF

Main Data | Bore: 270 mm, Stroke: 330 mm

Speed	720 rpm		750 rpm		900 rpm		1000 rpm	
Frequency	60 Hz		50 Hz		60 Hz		50 Hz	
	Eng.kW	Gen.kW	Eng.kW	Gen.kW	Eng.kW	Gen.kW	Eng.kW	Gen.kW
6H27DF	1,368	1,300	1,422	1,351	1,710	1,625	1,860	1,767
7H27DF	1,596	1,516	1,659	1,576	1,995	1,895	2,170	2,062
8H27DF	1,824	1,733	1,896	1,801	2,280	2,166	2,480	2,356
9H27DF	2,052	1,949	2,133	2,026	2,565	2,437	2,790	2,651

Based on alternator efficiency of 95 %.

Power adjusting between -5% derating is generally accepted, other power adjusting must be consulted to engine builder.

Heat Rate & SFOC (100% Load)

	720 rpm / 750 rpm	900 rpm / 1000 rpm
Heat rate @ Gas mode	7,729 kJ/kWh	7,729 kJ/kWh
SFOC @ Diesel mode	186 g/kWh	186 g/kWh

Specific Lubricating Oil Consumption

Lub. Oil: 0.6 g/kWh




URL: <http://www.soar.hk>
E-mail: sale@soar.hk
Phone: +86-4008111308

Dimensions

Speed	cyl.	Dimension (mm)				Dry Mass (ton)	
		A	B ¹⁾	C ¹⁾	H	Engine ²⁾	GenSet ^{1,3)}
720 / 750 rpm	6	4,414	2,262	6,676	3,103	21.2	30.8
	7	4,794	2,262	7,056	3,241	23.5	34.9
	8	5,311	2,262	7,573	3,241	25.1	40.5
	9	5,691	2,262	7,953	3,371	27.2	46.0

Speed	cyl.	Dimension (mm)				Dry Mass (ton)	
		A	B ¹⁾	C ¹⁾	H	Engine ²⁾	GenSet ^{1,3)}
900 / 1000 rpm	6	4,414	2,262	6,676	3,103	21.2	30.8
	7	4,794	2,262	7,056	3,241	23.5	34.9
	8	5,311	2,340	7,651	3,371	25.1	40.5
	9	5,691	2,490	8,181	3,371	27.2	46.0

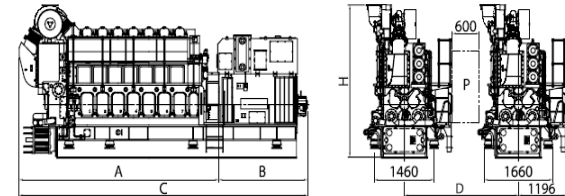

Remarks

- 1) Depending on alternator.
- 2) Weight included a standard alternator (Maker : HHI-EES)
- 3) With Common base frame

P: Free passage between the engines : 600 mm x 2,000 mm.

Note) All dimensions and weight are approximate value and subject to change without prior notice.