




# MAN Gas Generator Sets Specification



## L32/40G

Bore 320mm, Stroke 400 mm				
Speed (r/min)	750		720	
Frequency (Hz)	50		60	
Compression ratio	11.5:1		11.5:1	
Piston speed (m/s)	10.0		9.6	
Gensets Model	Gensets (kW)	Engine (kW)	Gensets (kW)	Engine (kW)
6L32/40G	2,280	2,400	2,210	2,310
9L32/40G	3,420	3,600	3,290	3,465
Consumption				
Cyl.No	6		9	
Heat Rate	8,180 KJ/kWh		8,180 KJ/kWh	
Lube oil consumption	1.0 kg/h		1.5 kg/h	
Genset Heat Rate at 100% load. Gas: MN≥80%, LHV≥32,400kJ/Nm <sup>3</sup> (0°C, 101.32kPa). Nominal generator efficiencies: 95%.				
Dimensions				
Cyl.No.		6		9
A	mm	5,940		7,215
B	mm	3,015		4,100
C	mm	8,955		1,1315
W	mm	2,746		2,746
H	mm	4,970		4,970
Dry mass	t	68		89

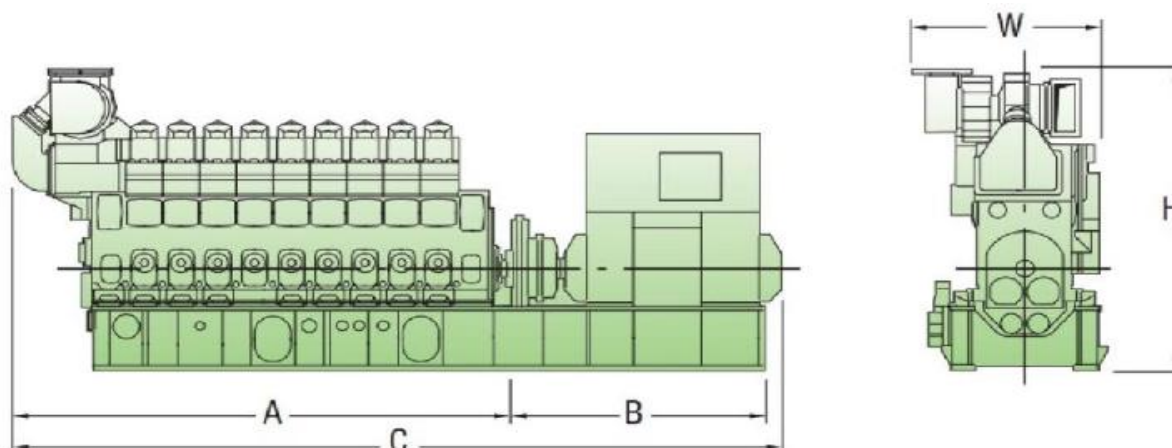

URL: <http://www.soarpower.com>

E-mail: [sale@soarpower.com](mailto:sale@soarpower.com)

Phone: +86-4008111308