

L58/64

Bore 580 mm, Stroke 640 mm

| | | |
|--------------------------|--------------------|--------------------|
| Speed (r/min) | 428 | 400* |
| Mean eff. pressure (bar) | 23.2 | 23.2 |
| Piston speed (m/s) | 9.1 | 8.5 |
| Model | Engine (kW) | Engine (kW) |
| 6L58/64 | 8,400 | 7,860 |
| 7L58/64 | 9,800 | 9,170 |
| 8L58/64 | 11,200 | 10,480 |
| 9L58/64 | 12,600 | 11,790 |

Consumption


| | | |
|------------------------------|------|-----|
| MCR | 100% | 85% |
| Fuel oil consumption (g/KWh) | 176 | 176 |
| Lube oil consumption (g/KWh) | 0.8 | 0.8 |

Dimensions

| Cyl. No. | | 6 | 7 | 8 | 9 |
|----------------|----|-------|--------|--------|--------|
| L | mm | 9,190 | 10,600 | 11,600 | 12,600 |
| L ₁ | mm | 7,810 | 8,810 | 9,810 | 10,810 |
| W | mm | 3,550 | 3,550 | 3,550 | 3,550 |
| H | mm | 5,140 | 5,140 | 5,140 | 5,140 |
| Dry mass | t | 149 | 170 | 189 | 208 |

Minimum centreline distance for twin engine installation: 3,800mm.

* For Generator drive only (400rpm 发动机仅供配套发电机组使用).

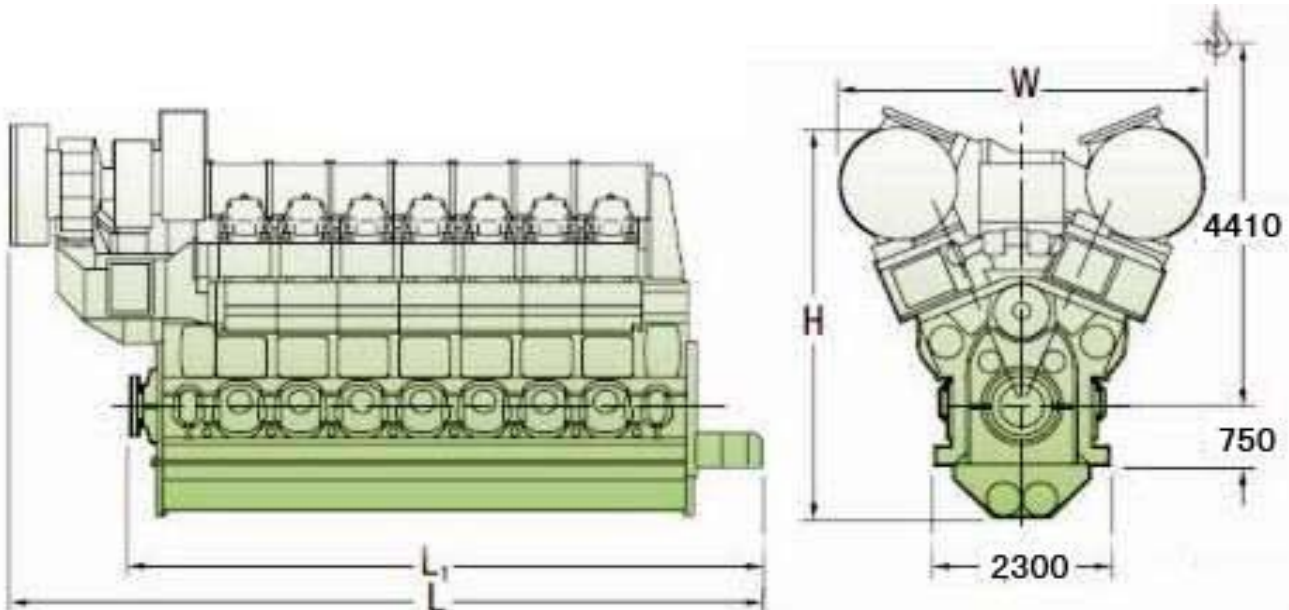

URL: <http://www.soarpower.com>

E-mail: sale@soarpower.com

Phone: +86-4006170048