

MAN L32/40



缸径：320 mm，冲程：400 mm

转速	r/min	720	750		
频率	Hz	60	50		
		柴油机功率/kW	发电机功率/kW*	柴油机功率/kW	发电机功率/kW*
6L32/40		3,000	2,895	3,000	2,895
7L32/40		3,500	3,380	3,500	3,380
8L32/40		4,000	3,860	4,000	3,860
9L32/40		4,500	4,345	4,500	4,345

尺寸

气缸数		6	7	8	9
	r/min	720/750	720/750	720/750	720/750
A	mm	6,340	6,870	7,400	7,930
B	mm	3,415	3,415	3,635	3,635
C	mm	9,755	10,285	11,035	11,565
H	mm	4,622	4,622	4,840	4,840
净重	t	75.0	79.0	87.0	91.0



注：具体尺寸根据具体电机型号确定，以上尺寸仅供参考。

Note: The above dimension: only reference.

The final dimensions are determined by the type of generator.

*基于电机效率为96.5%，具体机组功率由发电机效率决定。



*Based on nominal generator efficiencies of 96.5%.





L32/40

- 结构 Configuration: 直列In-line
- 缸径 Bore: 320mm
- 冲程 Stroke: 400 mm
- 转速 Speed: 720/750 rpm
- 单缸功率 Cylinder rating: 500kW
- 平均活塞速度 Mean Piston speed: 9.6/10.m/sec
- 平均有效压力 Mean eff.press.: 25.9/24.9bar
- 最大燃烧压力 Max.combust.press.: 190bar
- 燃油 Fuel quality: ISO RMK700

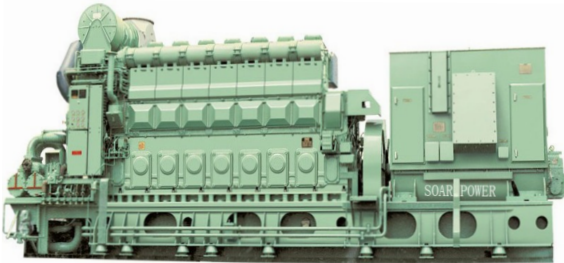

P柴油机之间的自由通道, 宽600 mm高2000mm。
P Free passage between the engines, width 600 mm and height 2000 mm.
Q柴油机间隔的最小距离: 2835mm(不带操作平台), 3220mm(带操作平台)。
Q~Min.distance between centre of engines: 2835mm(without gallery)
~3220mm(with gallery).



URL: <http://www.soar.hk>
E-mail: sale@soar.hk
Phone: +86-4008111308