

## MAN V32/40



缸径：320 mm，冲程：400 mm

转速	r/min	750	720		
频率	Hz	50	60		
		柴油机功率/kW	发电机功率/kW*	柴油机功率/kW	发电机功率/kW*
12V32/40		6,000	5,820	6,000	5,820
14V32/40		7,000	6,790	7,000	6,790
16V32/40		8,000	7,760	8,000	7,760
18V32/40		9,000	8,730	9,000	8,730

## 尺寸

气缸数		12	14	16	18
L	mm	11,045	11,710	12,555	13,185
L <sub>1</sub>	mm	10,450	11,115	11,950	12,580
W	mm	3,365	3,365	3,730	3,730
H	mm	4,850	4,850	5,245	5,245
干重	t	101	113	126	138


注：具体尺寸根据具体电机型号确定，以上尺寸仅供参考。

Note: The above dimension: only reference.

The final dimensions are determined by the type of generator.

\*基于电机效率为97%，具体机组功率由发电机效率决定。

\*Based on nominal generator efficiencies of 97%.

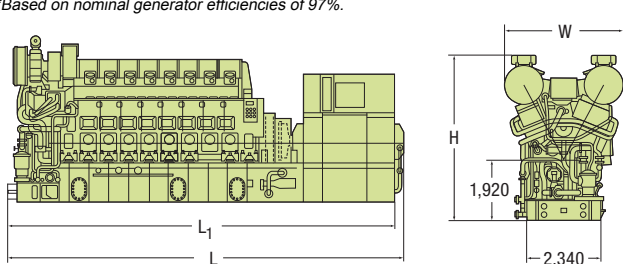
URL: <http://www.soar.hk>E-mail: [sale@soar.hk](mailto:sale@soar.hk)

Phone: +86-4008111308



## V32/40

- 结构 Configuration: V-Type  
缸径 Bore: 320mm  
冲程 Stroke: 400 mm  
转速 Speed: 720/750 rpm  
单缸功率 Cylinder rating: 500kW  
平均活塞速度 Mean Piston speed: 9.6/10.m/sec  
平均有效压力 Mean eff.press.: 25.9/24.9bar  
最大燃烧压力 Max.combust.press.: 190bar  
燃油 Fuel quality: ISO RMK700



URL: <http://www.soar.hk>  
E-mail: [sale@soar.hk](mailto:sale@soar.hk)  
Phone: +86-4008111308