


ZCP Generator Sets Specification

6N260ZLD

Bore 260 mm, Stroke 330 mm

Main Data				
Speed	750 rpm		720 rpm	
Frequency	50 Hz		60 Hz	
Model	Genset. kW	Engine. kW	Genset. kW	Engine. kW
1500GF	1,500	1,610	-	-
1400GF	1,400	1,544	1,400	1,544
Based on alternator efficiency of 95%.				
Specific Consumption				
100% Load		Unit		
Fuel Oil Consumption		g/kWh	188	
Lube oil consumption		g/kWh	0.6	
Dimensions & Weight				
Cyl. No.	Dimensions (mm) ¹⁾			Dry Mass (ton) ²⁾
	L	B	H	Genset ^{1), 3)}
6	6,850	2,320	3,276	32

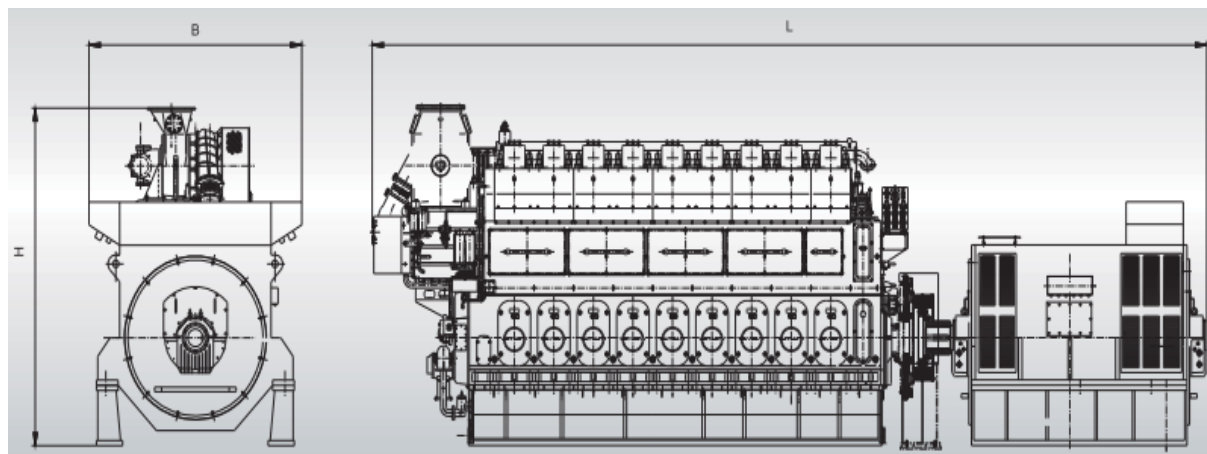

Remarks:

- 1) Depending on alternator.
- 2) Weight included a standard alternator (Maker: ZCP).
- 3) With common base frame & alternator.
- 4) This size is only for reference. The actual size is subject to the size defined in the agreement of the specific project.

URL: <http://www.soarpower.com>

E-mail: sale@soarpower.com

Phone: +86-4008111308