


ZCP Generator Sets Specification

8N350ZLD

Bore 350 mm, Stroke 450 mm

Main Data				
Speed	600 rpm		600 rpm	
Frequency	50 Hz		60 Hz	
Model	Genset. kW	Engine. kW	Genset. kW	Engine. kW
4300GF	4,300	4,568	4,300	4,568
4000GF	4,000	4,263	4,000	4,263
Based on alternator efficiency of 95-96.5%.				
Specific Consumption				
100% Load		Unit		
Fuel Oil Consumption		g/kWh	185	
Lube oil consumption		g/kWh	0.7	
Dimensions & Weight				
Cyl. No.	Dimensions (mm) 1)			Dry Mass (ton) 2)
	L	B	H	Genset 1), 3)
8	10,134	3,283	4,525	75-76

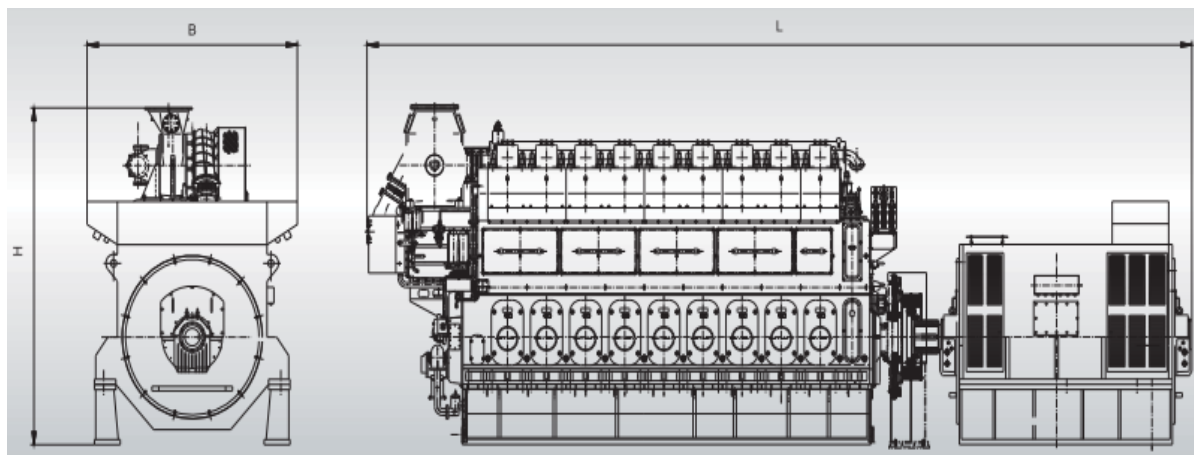

Remarks:

- 1) Depending on alternator.
- 2) Weight included a standard alternator (Maker: ZCP).
- 3) With common base frame & alternator.
- 4) This size is only for reference. The actual size is subject to the size defined in the agreement of the specific project.

URL: <http://www.soarpower.com>

E-mail: sale@soarpower.com

Phone: +86-4008111308