


ZCP Generator Sets Specification

L6230ZLD

Bore 225 mm, Stroke 290 mm

Main Data				
Speed	1000 rpm		900 rpm	
Frequency	50 Hz		60 Hz	
Model	Genset. kW	Engine. kW	Genset. kW	Engine. kW
1200GF	1,200	1,324	-	-
1000GF	1,000	1,103	1,000	1,103
800GF	800	882	800	882
Based on alternator efficiency of 95%.				
Specific Consumption				
100% Load		Unit		
Fuel Oil Consumption		g/kWh	190	
Lube oil consumption		g/kWh	0.6	
Dimensions & Weight				
Cyl. No.	Dimensions (mm) 1)			Dry Mass (ton) 2)
	L	B	H	Genset 1), 3)
6	5,484	1,675	2704	16.5

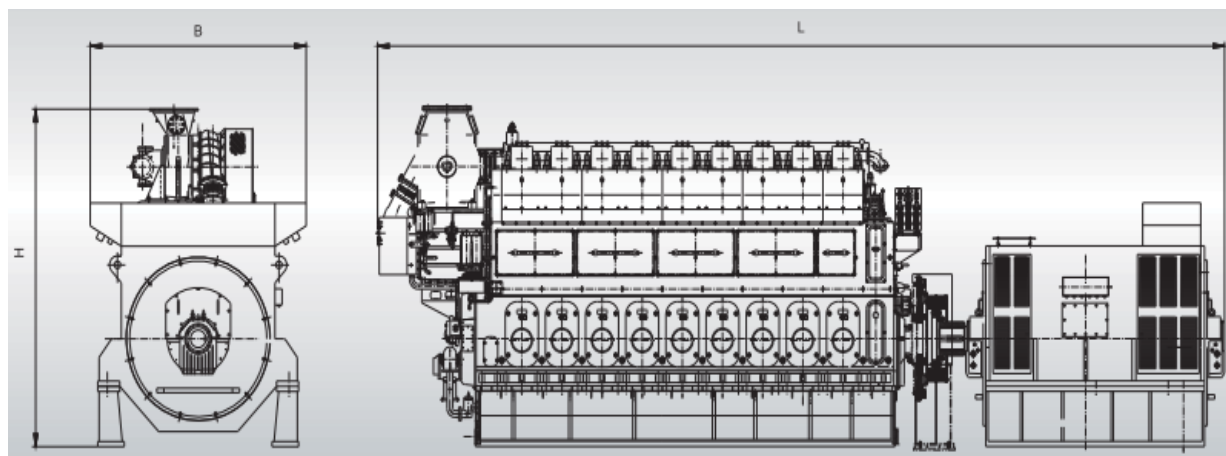

Remarks:

- 1) Depending on alternator.
- 2) Weight included a standard alternator (Maker: ZCP).
- 3) With common base frame & alternator.
- 4) This size is only for reference. The actual size is subject to the size defined in the agreement of the specific project..

URL: <http://www.soarpower.com>

E-mail: sale@soarpower.com

Phone: +86-4008111308