


ZCP Generator Sets Specification

LB6250ZLD

Bore 250 mm, Stroke 320 mm

Main Data				
Speed	750 rpm		720 rpm	
Frequency	50 Hz		60 Hz	
Model	Genset. kW	Engine. kW	Genset. kW	Engine. kW
1000GF	1,000	1,103	1,000	1,103
900GF	900	1,000	-	-
800GF	800	882	800	882
Based on alternator efficiency of 95%.				
Specific Consumption				
100% Load		Unit		
Fuel Oil Consumption		g/kWh	190	
Lube oil consumption		g/kWh	0.6	
Dimensions & Weight				
Cyl. No.	Dimensions (mm) 1)			Dry Mass (ton) 2)
	L	B	H	Genset 1), 3)
6	6,520	1,800	2,980	27.5

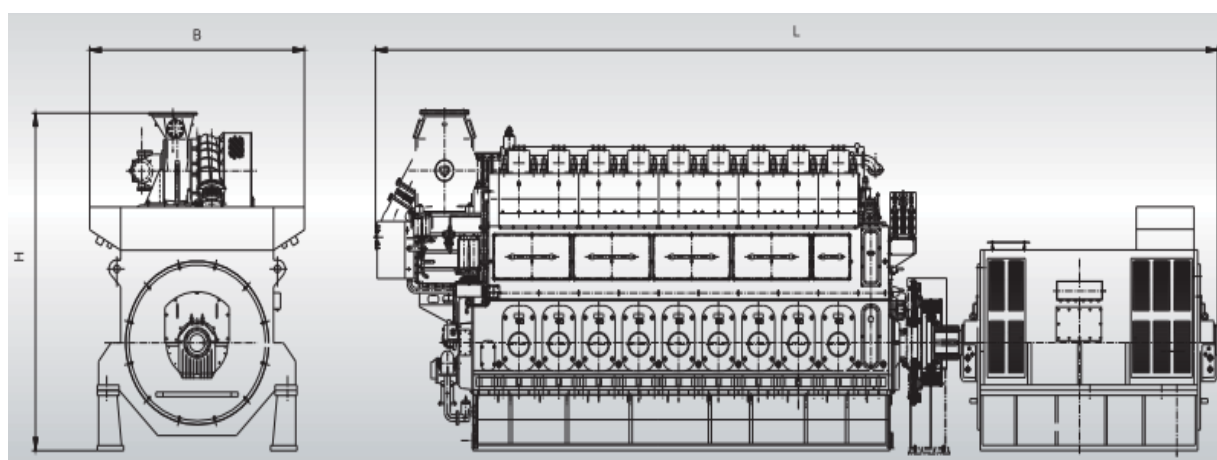

Remarks:

- 1) Depending on alternator.
- 2) Weight included a standard alternator (Maker: ZCP).
- 3) With common base frame & alternator.
- 4) This size is only for reference. The actual size is subject to the size defined in the agreement of the specific project.

URL: <http://www.soarpower.com>

E-mail: sale@soarpower.com

Phone: +86-4008111308